

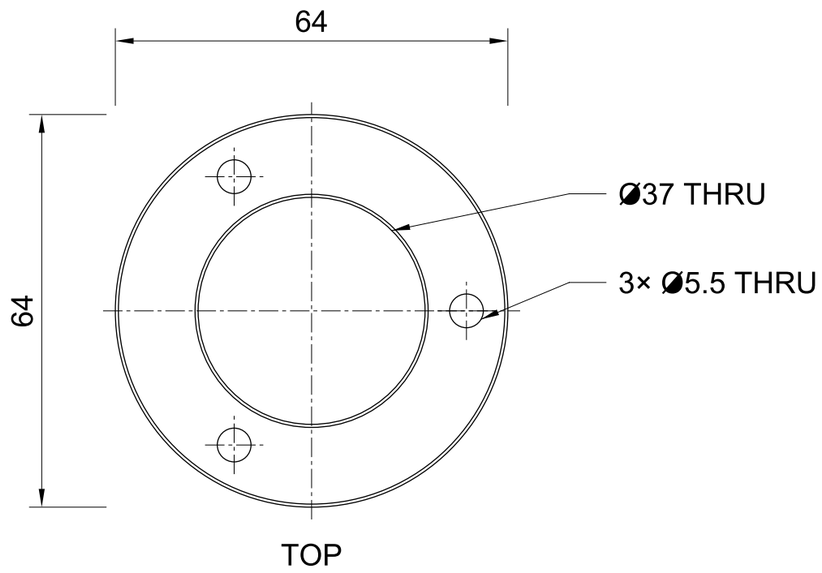



TOP

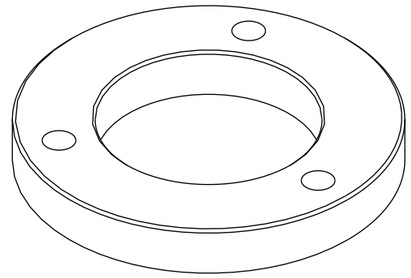

ISOMETRIC



FRONT



RIGHT

NOTES: 1. TOLERANCES PER ISO 2768-m UNLESS OTHERWISE SPECIFIED.
2. DVG MAZ09 REF: OD 64.0 x ID 37.0 x THK 8.5 MM, ROTATION R
3. 3 MOUNTING HOLES (EST. PCD 50.5 MM x D5.5 MM FOR M5 SCREW)
4. COATING VARIANTS: 9M8K-RED (RED SPEED) / 9M8K-NQ (NANOTECH) / 9M8K-TIN
5. COMPATIBLE: MAZZER SUPER JOLLY / FIORENZATO F5 · WE 57 NGUYEN QUANG DIEU

LUOI XAY PHANG MAZZER SUPER JOLLY - 9M8K	SCALE 1:1 MM THIRD ANGLE
9M8K / M-FMA00033M · THEP TOI CUNG (LONG LIFE / RED SPEED) · Warehouse Espresso	SHEET 1 OF 1 REV A mazzer_burr_drawing